



CCP-050 Model 14 Pin DIP, 5.0V, PECL

Frequency Range:	30MHz to 160MHz
Frequency Stability:	±10ppm to ±100ppm
Temperature Range:	See Table 1
Storage:	-55°C to 120°C
Input Voltage:	5.0V ± 0.5V
Input Current:	50mA Max
Output:	PECL
Symmetry:	40/60% Max @ 50% Vdd
(Option Y)	45/55% Max
Rise/Fall Time:	1ns Typ, 2ns Max (20% - 80%)
Output Voltage:	Voh = 3.90V Min, 4.05V Max Vol = 3.15V Min, 3.25V Max
Load:	50 Ohms to Vcc-2V
Configuration:	(Option C) Complementary Output (Option S) Single Output
Aging:	<3ppm first year




Designed to meet today's requirements for economical PECL applications.

****Custom Designs Available**

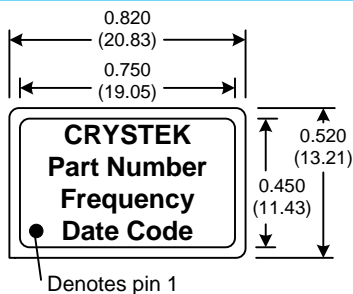


Dimensions inches (mm)

All dimensions are Max unless otherwise specified.

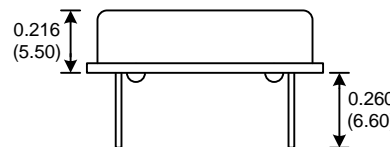

PIN	Function
1	Comp or NC
7	GND
8	OUT
14	Vcc

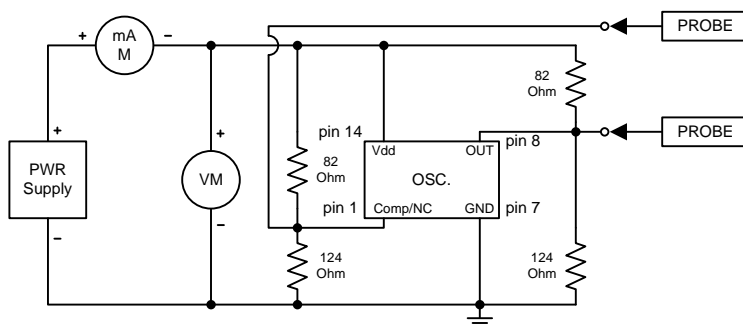

	Operating Temperature	Freq. Stability (± ppm)				
		10	20	25	50	100
A	0°C to 50°C	10	20	25	50	100
B	0°C to 70°C	10	20	25	50	100
C	-10°C to 60°C		20	25	50	100
D	-10°C to 70°C		20	25	50	100
E	-20°C to 70°C			25	50	100
F	-30°C to 75°C			25	50	100
G	-40°C to 85°C			25	50	100

Table 1

Crystek Part Number Guide

CCP-050 C A Y - 25 - 155.520

#1 #2 #3 #4 #5 #6

#1 Crystek 14 Pin Dip PECL Oscillator
 #2 Output Option: (C = Comp) (S = Single)
 #3 Operating Temp.: (see table 1)
 #4 Symmetry: (Blank = 40/60, Y=45/55)
 #5 Stability PPM: (see table 1, Blank = 100ppm)
 #6 Frequency in MHz: 3 or 6 decimal places

Example:
 CCP-050CAY-25-155.520 = 5.0V, Comp., 0/50°C, 45/55, 25ppm, 155.520MHz
 CCP-050SA-156.250 = 5.0V, Single, 0/50°C, 40/60, 156.250MHz

Specifications subject to change without notice.

TD-021018 Rev. F