





Differential LVPECL Voltage Controlled Crystal Oscillator

CVPD-914 Model 9x14 mm SMD, 3.3V, LVPECL


Frequency Range:	77.760MHz to 200MHz
Temperature Range:	0°C to 70°C
	(Option M) -20°C to 70°C
	(Option X) -40°C to 85°C
Storage:	-45°C to 90°C
Input Voltage:	3.3V ±0.3V
Control Voltage:	1.65V ±1.65V
Settability At Nominal:	1.65V ±0.25V
Input Current:	50mA Typ., 88mA Max
Output:	Differential LVPECL
	Symmetry: 45/55% Max @ 50% Vdd
	Rise/Fall Time: 1ns Max @ 20% to 80% Vdd
	Pulling Range: ±50ppm APR Min. (std)
	Linearity: ±10% Max
	Logic: Terminated to Vdd-2V into 50 ohms
	Temp. 0°C to 85°C
	"0" = 1.490 Min, 1.680 Max
	"1" = 2.275 Min, 2.420 Max
	Temp. -40°C to 0°C
	"0" = 1.470 Min, 1.745 Max
	"1" = 2.215 Min, 2.420 Max
	Enable/Disable Time: 200ns Max
Jitter:	12kHz to 80MHz
Aging:	0.5psec Typ., 1psec RMS Max <5ppm 1st/yr, <2ppm every year thereafter




Designed to meet today's requirements for 3.3V Differential LVPECL applications. The CVPD-914 is produced using mesa crystal design to provide a very low noise, low jitter voltage controlled clock oscillator for demanding telecom and other applications.

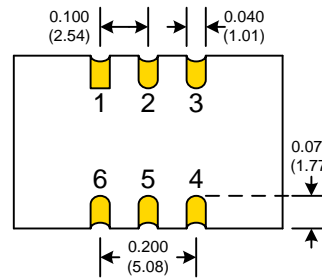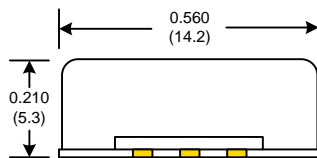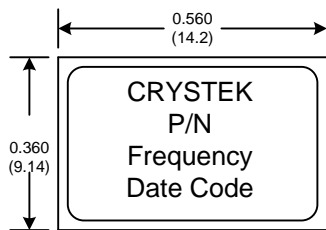

SUGGESTED PAD LAYOUT

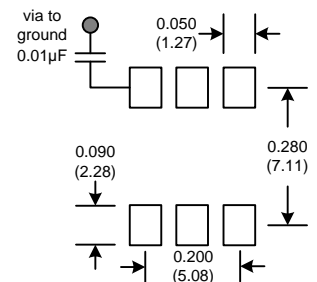

RECOMMENDED REFLOW SOLDERING PROFILE

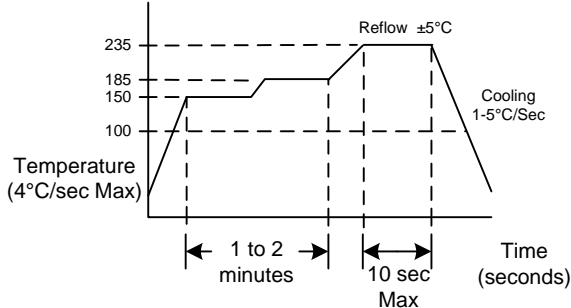

260°C Reflow Profile NOT recommended for this product

Crystek Part Number Guide

CVPD-914 - X - 50 - 155.520

#1 #2 #3 #4 #5

#1 Crystek 9x14 SMD PECL VCXO
#2 Model 033 = 3.3V
#3 Temp. Range: Blank = 0/70°C, M= -20/70°C, X=-40/85°C
#4 Pulling: (see Table 1)
#5 Frequency in MHz: 3 or 6 decimal places

Pulling (APR) Min.

Blank	± 100ppm
50 (std)	± 50ppm
25	± 25ppm
20	± 20ppm

Table 1

Example:

CVPD-914X-50-155.520 = 3.3V, 45/55, -40/85°C, 50ppm APR, 155.520 MHz

PIN	Function
1	Volt Cont.
2	E/D
3	GND
4	OUT
5	COU
6	Vcc

Enable/Disable Function	
E/D Pin	Output pin
Open	Active
"0" level 0.7×Vcc Max	Active
"1" level 0.3×Vcc Min	High Z

Standard Frequencies	
77.760	161.1328
155.520	166.6286
156.250	167.3316

Specifications subject to change without notice.

TD-030401 Rev. H