

CCPD-034 Model
5×7 mm SMD, 3.3V, LVPECL



Model CCPD-034 is a 162.000MHz to 312.500MHz LVPECL Clock Oscillator operating at 3.3Volts. The oscillator utilizes a High Q Third Overtone crystal design providing very low Jitter and Phase Noise. No Sub-Harmonics are present in the Output Signal.



5×7mm SMD

Applications:

Digital Video
SONET/SDH/DWDM
Storage Area Networks
Broadband Access
Ethernet, Gigabit Ethernet

Rev: N
Date: 01-Feb-10
Page 1 of 3



CCPD-034 Model

5x7 mm SMD, 3.3V, LVPECL

Frequency Range:	162.000MHz to 312.500MHz
Frequency Stability Options(ppm):	±20, ±25, ±50, ±100
Temperature Range:	(standard) 0°C to +70°C
	-20°C to +70°C
	(Option M)
	-40°C to +85°C
	(Option X)
	-45°C to 90°C
Storage:	
Input Voltage:	3.3V ± 0.3V
Input Current:	55mA Typ., 88mA Max
Output:	Differential LVPECL
	Symmetry: 45/55% Max @ 50% Vdd
	Rise/Fall Time: 1nsec Max @ 20% to 80% Vdd

Logic: Terminated to Vdd-2V into 50 Ω

Temp. 0°C to 85°C "0"=1.490 Min., 1.680 Max

"1"=2.275 Min., 2.420 Max

Temp. -40°C to 0°C

"0"=1.470 Min., 1.745 Max

"1"=2.215 Min., 2.420 Max

Disable Time: 200nSec Max


Enable Time: 1mSec Typ., 2mSec Max

Phase Jitter: 12kHz~80MHz 0.5psec Typ., 1psec RMS Max

Phase Noise: (See Plot Below)

Sub-harmonics: None

Aging: <3ppm 1st/yr, <1ppm every year thereafter

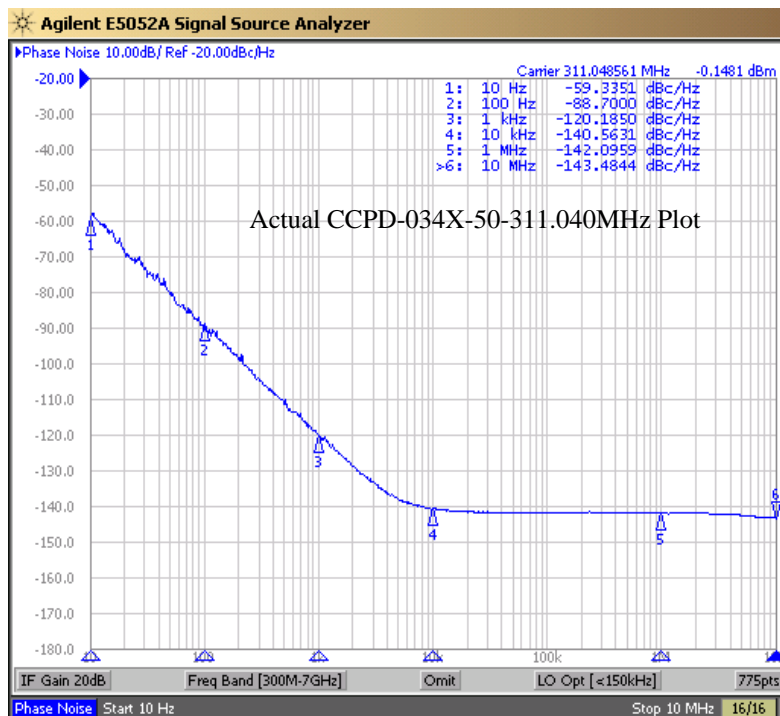

Rev: N
Date: 01-Feb-10
Page 2 of 3



CCPD-034 Model
5x7 mm SMD, 3.3V, LVPECL

Crystek Part Number Guide

CCPD - 034 X - 50 - 311.040

#1 #2 #3 #4 #5

#1 Crystek LVPECL Osc.
#2 Model 034
#3 Temp Range: Blank = 0/70°C, M = -20/70°C, X = -40/85°C
#4 Stability: (see Table 1)
#5 Frequency in MHz: 3 or 6 decimal places

Example:
CCPD-034X-50-311.040
3.3V, -40/85°C, ±50ppm, 311.040 MHz

Stability Indicator

Blank	± 100ppm
50	± 50ppm
25	± 25ppm
20*	± 20ppm

*not available in -40/85

Table 1

Standard Frequencies

(±50ppm, 0/70°C)
200.000MHz
212.500MHz
250.000MHz
311.040MHz
312.500MHz


Mechanical:

Shock: MIL-STD-883, Method 2002, Condition B
Solderability: MIL-STD-883, Method 2003
Vibration: MIL-STD-883, Method 2007, Condition A
Solvent Resistance: MIL-STD-202, Method 215
Resistance to Soldering Heat: MIL-STD-202, Method 210, Condition I or J


Environmental:

Thermal Shock: MIL-STD-883, Method 1011, Condition A
Moisture Resistance: MIL-STD-883, Method 1004


RECOMMENDED REFLOW SOLDERING PROFILE

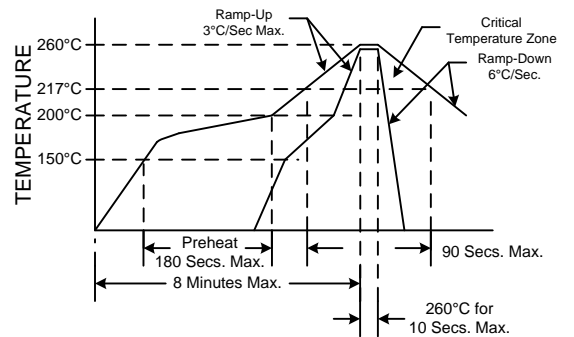


NOTE: Reflow Profile with 240°C peak also acceptable.




Dimensions inches (mm)
All dimensions are Max unless otherwise specified.

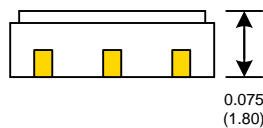

Tristate Function	
Function pin 1	Output pin
Open or N/C	Active
"1" level 0.7xVdd Min	Active
"0" level 0.3xVdd Max	High Z

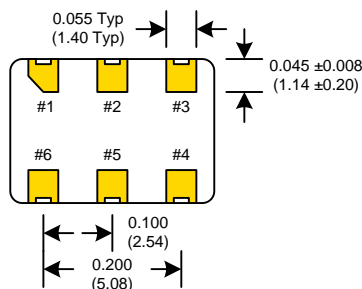

SUGGESTED PAD LAYOUT

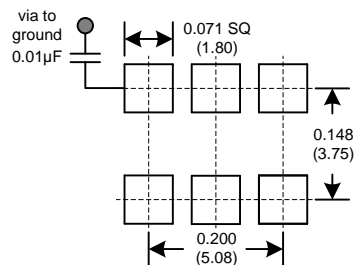

0.01µF Bypass Capacitor Recommended

PIN	Connection
1	Enable/Disable
2	N/C
3	GND
4	Output
5	Comp Output
6	Vcc

Rev: N
Date: 01-Feb-10
Page 3 of 3